

General Disclaimer

One or more of the Following Statements may affect this Document

- This document has been reproduced from the best copy furnished by the organizational source. It is being released in the interest of making available as much information as possible.
- This document may contain data, which exceeds the sheet parameters. It was furnished in this condition by the organizational source and is the best copy available.
- This document may contain tone-on-tone or color graphs, charts and/or pictures, which have been reproduced in black and white.
- This document is paginated as submitted by the original source.
- Portions of this document are not fully legible due to the historical nature of some of the material. However, it is the best reproduction available from the original submission.


TECHNICAL CHARACTERISTICS AND WORKING CONDITIONS OF LONG-TERM ORBITING "SALYUT"-TYPE SPACE STATIONS

(NASA-TM-75058) TECHNICAL CHARACTERISTICS
AND WORKING CONDITIONS OF LONG-TERM ORBITING
SALYUT-TYPE SPACE STATIONS (National
Aeronautics and Space Administration) 45 p
HC A03/MF A01 CSCL 22A

N78-18097

Unclass
05478

Translation of "Tekhnicheskkiye Kharakteristiki I
Rabochiye Parametry Dolgovremmennoy Orbital'noy
Stantsii Tipa "Salyut", Academy of Sciences USSR,
Report, Moscow, 1977, pp 1-42



NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
WASHINGTON, D.C. 20546 JANUARY 1978

TECHNICAL CHARACTERISTICS AND WORKING CONDITIONS
OF LONG-TERM ORBITING "SALYUT"-TYPE SPACE STATIONS

(NASA-TM-75058) TECHNICAL CHARACTERISTICS
AND WORKING CONDITIONS OF LONG-TERM ORBITING
SALYUT-TYPE SPACE STATIONS (National
Aeronautics and Space Administration) 45 p
HC A03/MF A01 CSCL 22A G3/15

N78-18097

Unclas
05478

Translation of "Tekhnicheskiye Kharakteristiki i
Rabochiye Parametry Dolgovremennoy Orbital'noy
Stantsii Tipa "Salyut", Academy of Sciences USSR,
Report, Moscow, 1977, pp 1-42



1. Report No. NASA TM-75058		2. Government Accession No.		3. Recipient's Catalog No.	
4. Title and Subtitle Technical Characteristics and Working Conditions of Long-Term Orbiting "Salyut"-Type Space Stations				5. Report Date January 1978	
				6. Performing Organization Code	
7. Author(s) see article				8. Performing Organization Report No.	
				10. Work Unit No.	
9. Performing Organization Name and Address Transemantics, Inc. 1901 Pennsylvania Ave., NW Washington, DC 20006				11. Contract or Grant No. NASw-2792	
				13. Type of Report and Period Covered Translation	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, DC 20546				14. Sponsoring Agency Code	
15. Supplementary Notes Translation of. "Tekhnicheskkiye Kharakteristiki I Rabochiye Parametry Dolgovremmennoy Orbital'noy Stantsii Tipa "Salyut", Academy of Sciences USSR, Report, Moscow, 1977, pp 1-42					
16. Abstract This document presents the technical characteristics and working conditions of the "Salyut"-type orbiting space stations which affect the selection of preliminary versions of scientific programs and the selection of plans in conjunction with space "shuttle" operations.					
17. Key Words (Selected by Author(s))			18. Distribution Statement Unclassified-Unlimited		
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 42	22.		

ACADEMY OF SCIENCES OF THE USSR
COUNCIL ON INTERNATIONAL
COOPERATION IN RESEARCH AND USES OF OUTER SPACE
"INTERCOSMOS"

117901 Moscow, V-71
Leninsky Prospect, 14
Cable address: Moscow, V-71
Intercosmos
Telex: 7564 ANS SU

Tel. 234-38-28

December 30, 1977

Dr. N. Hinners
Assistant Director
National Aeronautics and
Space Administration
U.S.A.

Dear Dr. Hinners:

I am sending you information on the "Salyut" space station as provided for in paragraph 4 of the Summary Document from the talks between specialists from NASA and the Academy of Sciences of the USSR, which took place November 17, 1977.

Respectfully yours,

B. N. Petrov
Academician
Chairman of the
"Intercosmos" Council

Enc: Reference materials in the "Salyut" space station

USSR RD2-005

TECHNICAL CHARACTERISTICS
AND WORKING CONDITIONS
OF LONG-TERM ORBITING
"SALYUT"-TYPE SPACE STATIONS

1977

This document presents the technical characteristics and working conditions of the "Salyut"-type orbiting space stations which affect the selection of preliminary versions of scientific programs and the selection of plans in conjunction with space "shuttle" operations.

/2.


CONTENTS

	PAGE <u>/3.</u>
1. General Characteristics	4
2. Installation of Scientific Equipment on board the Station	14
3. Docking Units	21
4. Orientation of the Station Relative to the Mass Center and Stabilization	24
5. Outline of Communications on the "Salyut" Space Station	30
6. Power Supply for the Scientific Equipment	31
7. Maintenance of the Heat Conditions for the Scientific Equipment	33
8. Atmospheric Characteristics in the Hermetically Sealed Compartments	35
9. Reactive Control Instruments	37
10. Characteristics of Flight Time	39
11. Rendezvous and Docking Characteristics of the "Salyut" Space Station and the "Shuttle" Craft ...	40

1. General Characteristics

/4.


1.1. Structure of the "Salyut"-type long-term orbiting space station

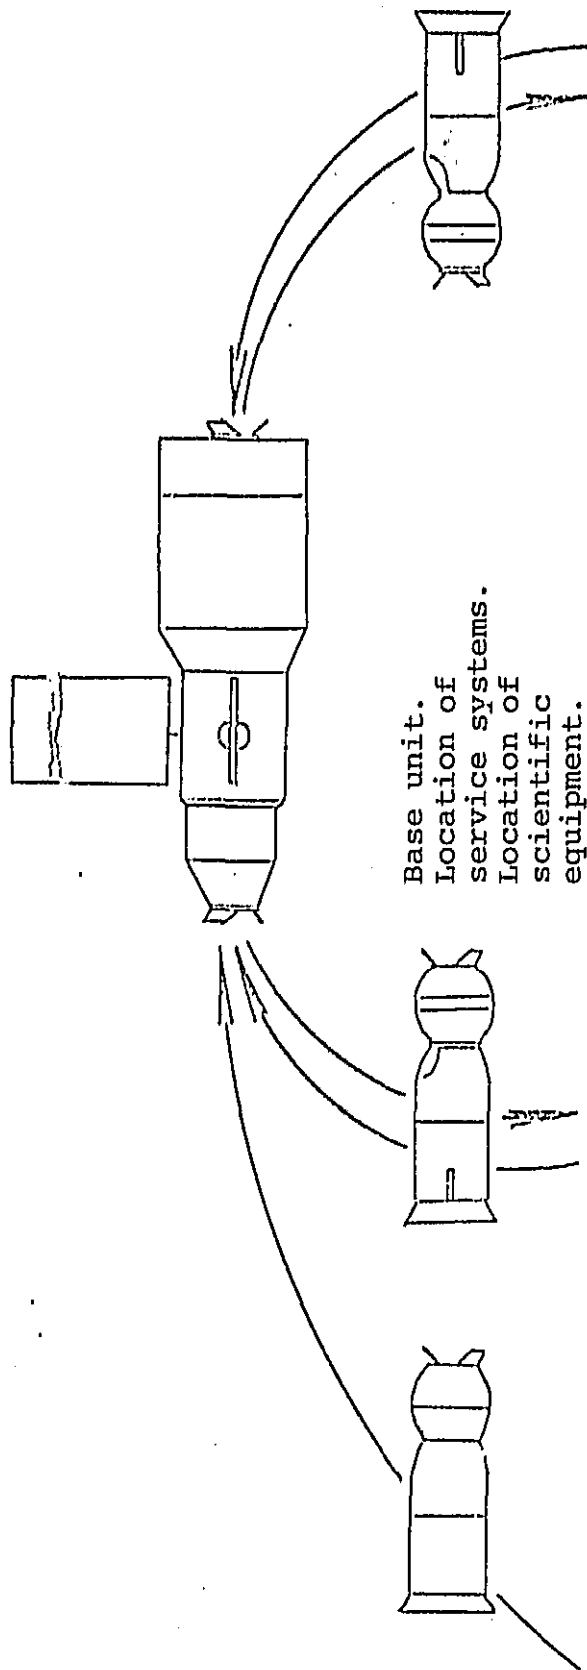

ORIGINAL PAGE IS
OF POOR QUALITY

1.2. General Structure of the Station

/5.

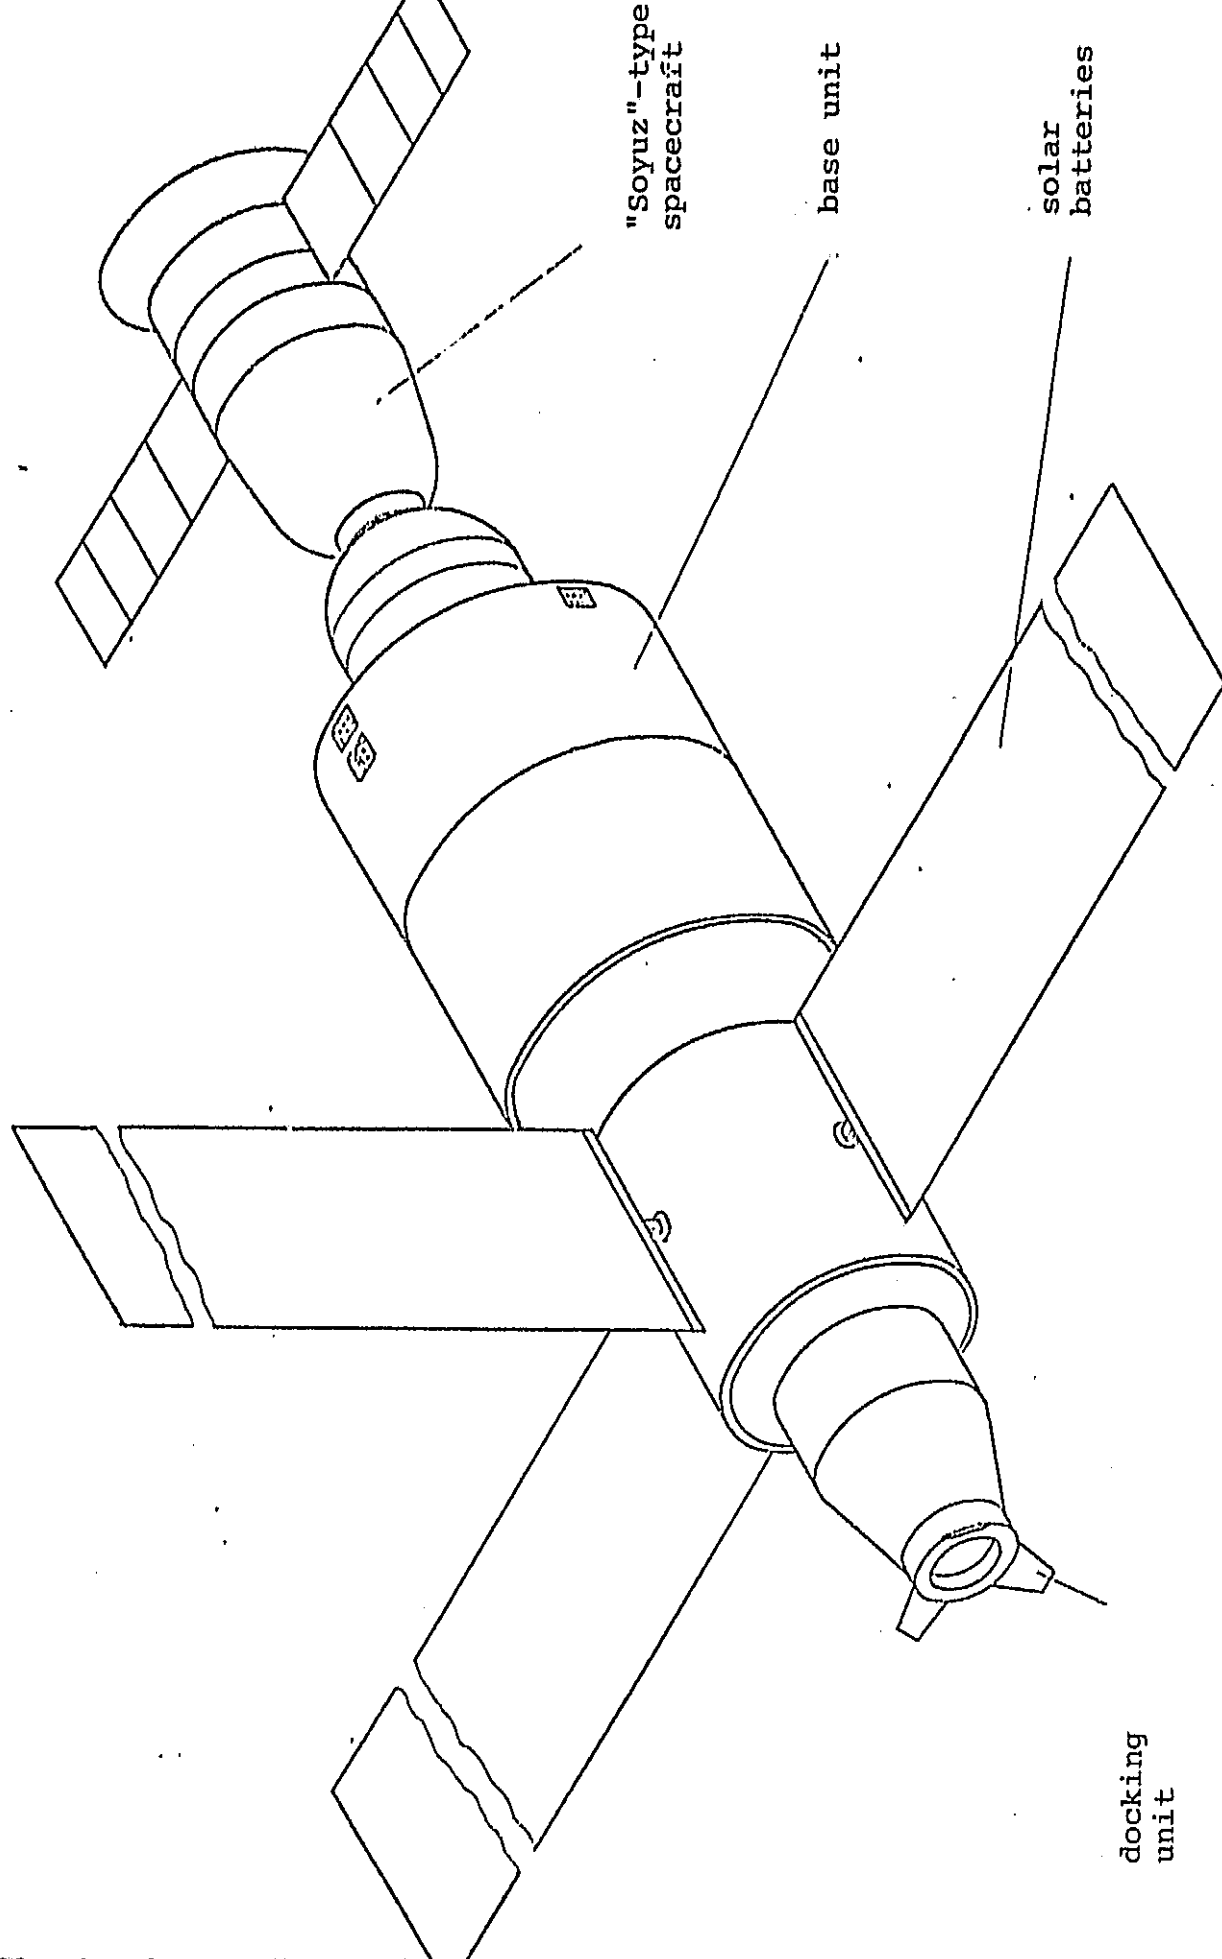


Characteristics or Working Conditions		Note
Item	Value	
1.3.1. Maximal longitudinal dimension of the station, meters	21	
1.3.2. Maximal cross-sectional dimension (along the solar batteries), meters	30-33	
1.3.3. Maximal diameter of the hermetically sealed chamber, meters	4.2	

ORIGINAL PAGE IS
OF POOR QUALITY

1.4. Systems of Coordinates

17.

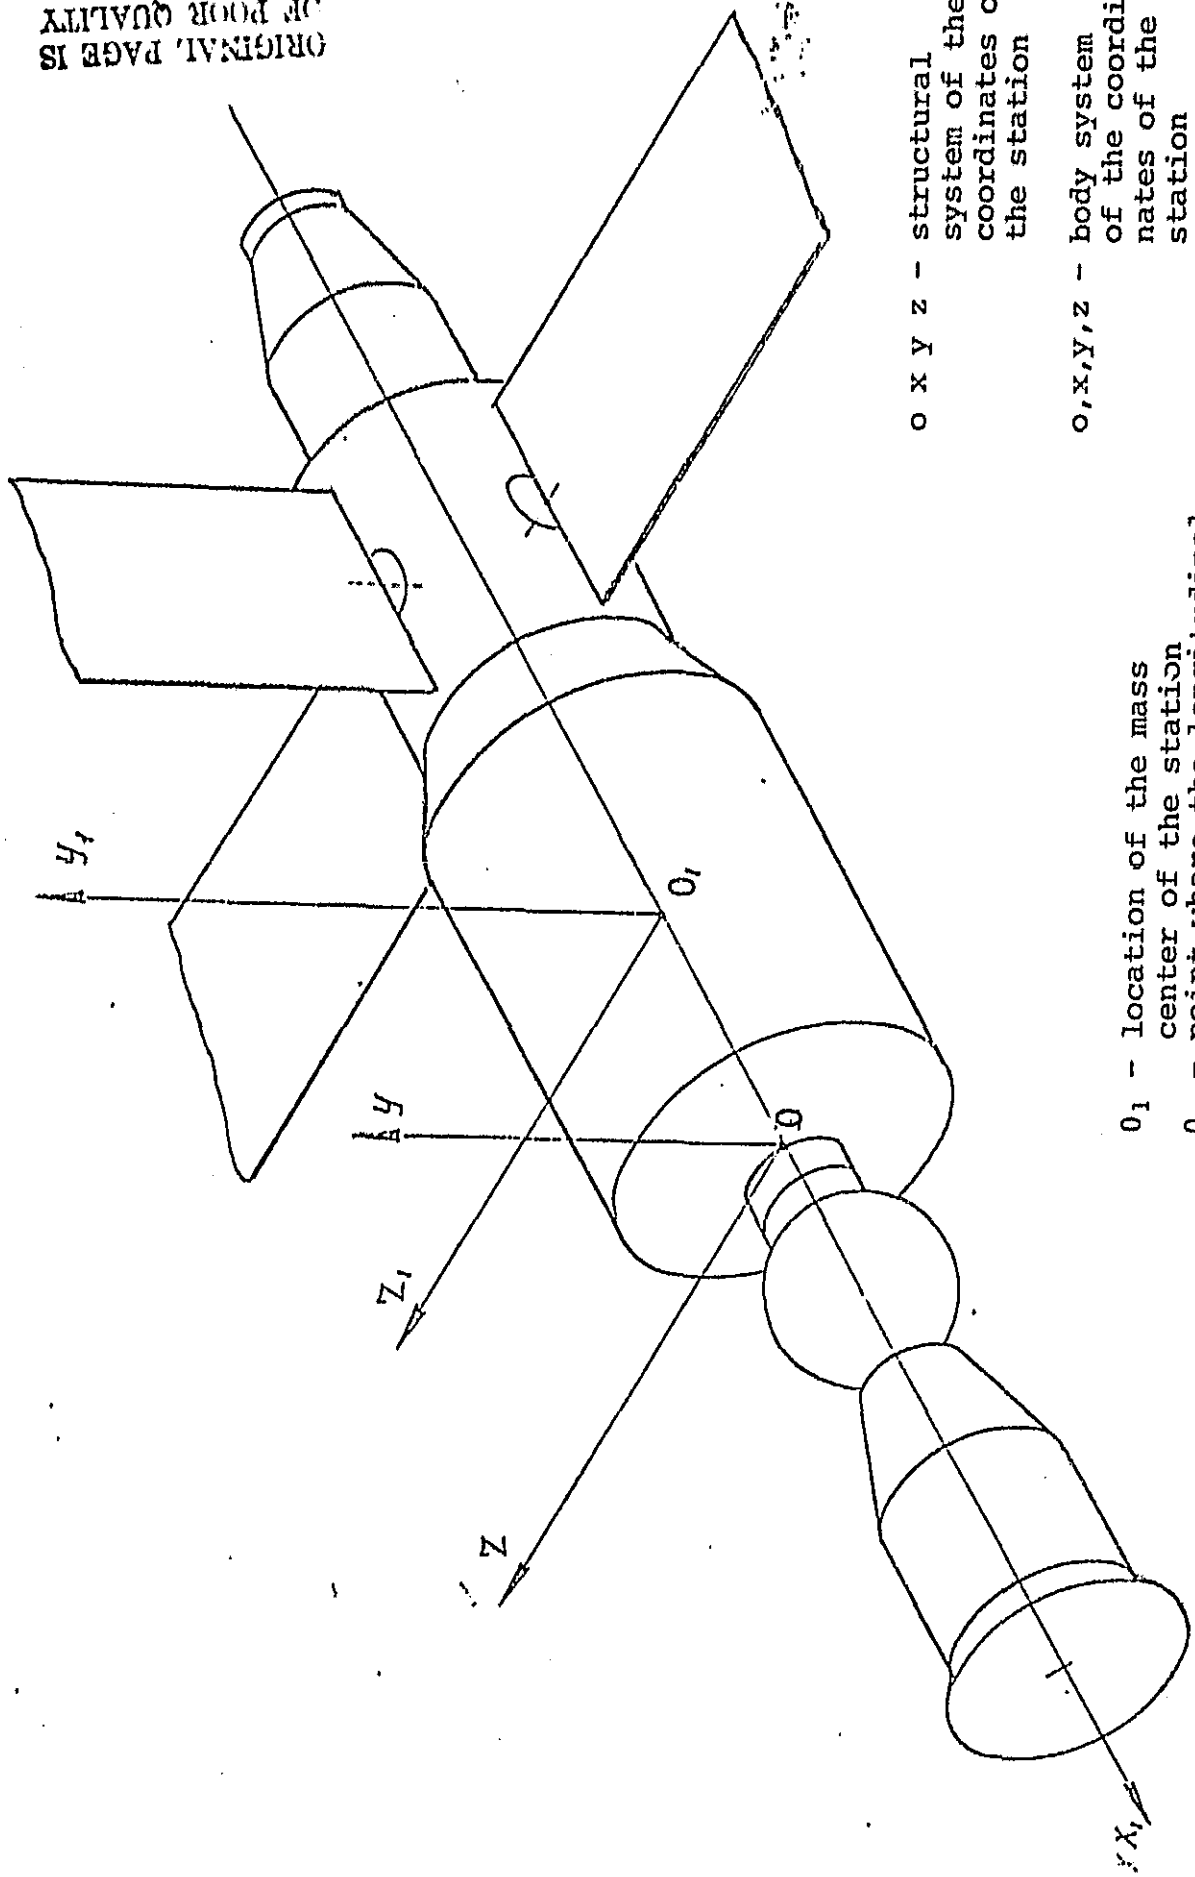


ORIGINAL PAGE IS
OF POOR QUALITY

Characteristics or Working Conditions		Note
Item	Value	
1.5.1. Mass of the station, t	26	Mass-inertia characteristics of the "Salyut" station at the moment of docking with the shuttle craft
1.5.2. Maximal moment of inertia of the station, kg m ²		
T_x	1.4×10^5	The moments of inertia are computed relative to the mass center of the station
T_y	1.2×10^6	
T_z	1.2×10^6	
1.5.3. Coordinates of the mass center of the station (for the maximal moment of inertia), m		
X_c	-8.3	
$ Y_c $	<0.1	
$ Z_c $	<0.1	

Characteristics or Working Conditions		Note
Item	Value	
1.5.4. Minimal moment of inertia of the station, $\text{kg} \cdot \text{m}^2$		
T_x	1.4×10^5	
T_y	8×10^5	
T_z	8×10^5	
1.5.5. Mass center coordinates of the station (for the minimal moment of inertia), m		
X_c	-2.7	
$ Y_c $	<0.1	
$ Z_c $	<0.1	

1.6. Orbital Parameters of the Space Station

/10.

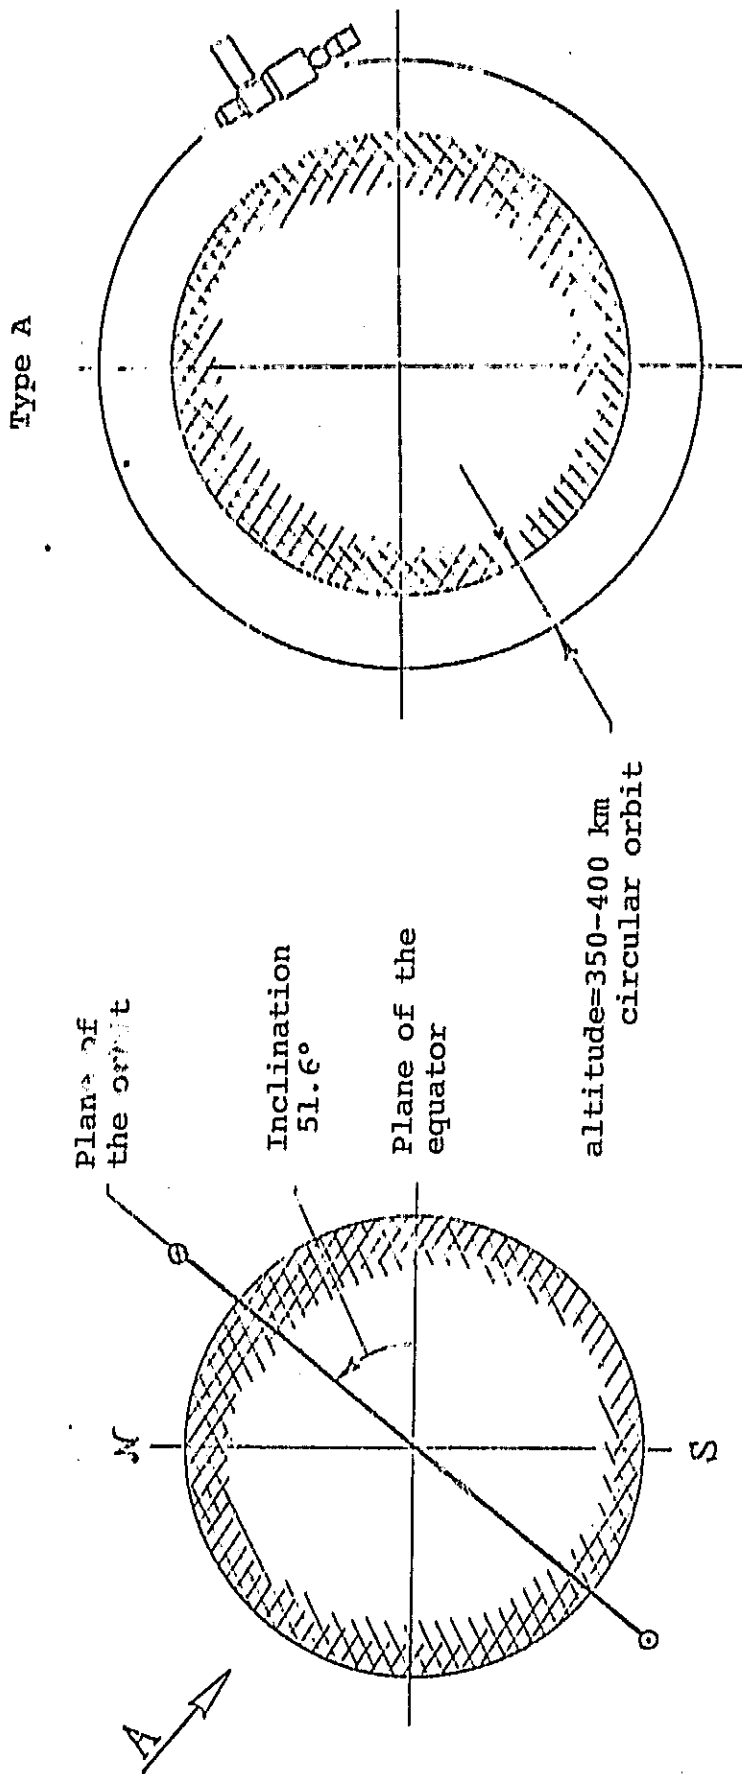

ORIGINAL PAGE IS
OF POOR QUALITY

1.7. Time Characteristics

/11.

Characteristics or Working Conditions		Note
Item	Value	
1.7.1. Total flight time of the station, years	1.5-2	Operation "A": the "Salyut" station and the "shuttle" craft - two mutually guided but separately flying objects
1.7.2. Length of the flight in operation "A"	Orbital flight	
1.7.3. Length of the flight in operation "B", days	up to 5	Operation "B": "Salyut" station and "shuttle" craft in docked position
1.7.4. Length of flight in operation "C", years	up to 0.5	Operation "C": "Salyut" station operates with scientific equipment, supplied by the "shuttle"

1.8. Crew of the Station

/12.

Characteristics or Working Conditions		Note
Item	Value	
1.8.1. Number of crew members	2	

Characteristics or Working Conditions		Note
Item	Value	
1.9.1 Number of crew members who walk in space	2	
1.9.3. Diameter of the passage section in the hatch for exiting into space, m	0.8	

2. INSTALLATION OF SCIENTIFIC EQUIPMENT ON BOARD THE STATION /14.

2.1. Mass of units of scientific equipment transported on the "shuttle"


Characteristics or Working Conditions		Note
Item	Value	
2.1.1. Mass of scientific equipment, installed outside the station, t	5 - 10	
2.1.2. Mass of scientific equipment installed inside the space station	up to 0.5	

2.2. Overall Dimensions of Units of Scientific Equipment /15.

Characteristics or Working Conditions		Note
Item	Value	
<p>2.2.1. Maximal dimensions of scientific equipment installed on the outside of the station:</p> <p>cross-sectional dimensions, m</p> <p>length, m</p>	<p>4 x 2.2</p> <p>up to 16</p>	
<p>2.2.2. Maximal dimensions of scientific equipment installed inside the station:</p> <p>diameter, m</p> <p>length, m</p>	<p>0.6</p> <p>0.6</p>	

2.3. Possible Locations for the Scientific Equipment
Transported by the "Shuttle" craft (Variation I)


/16.

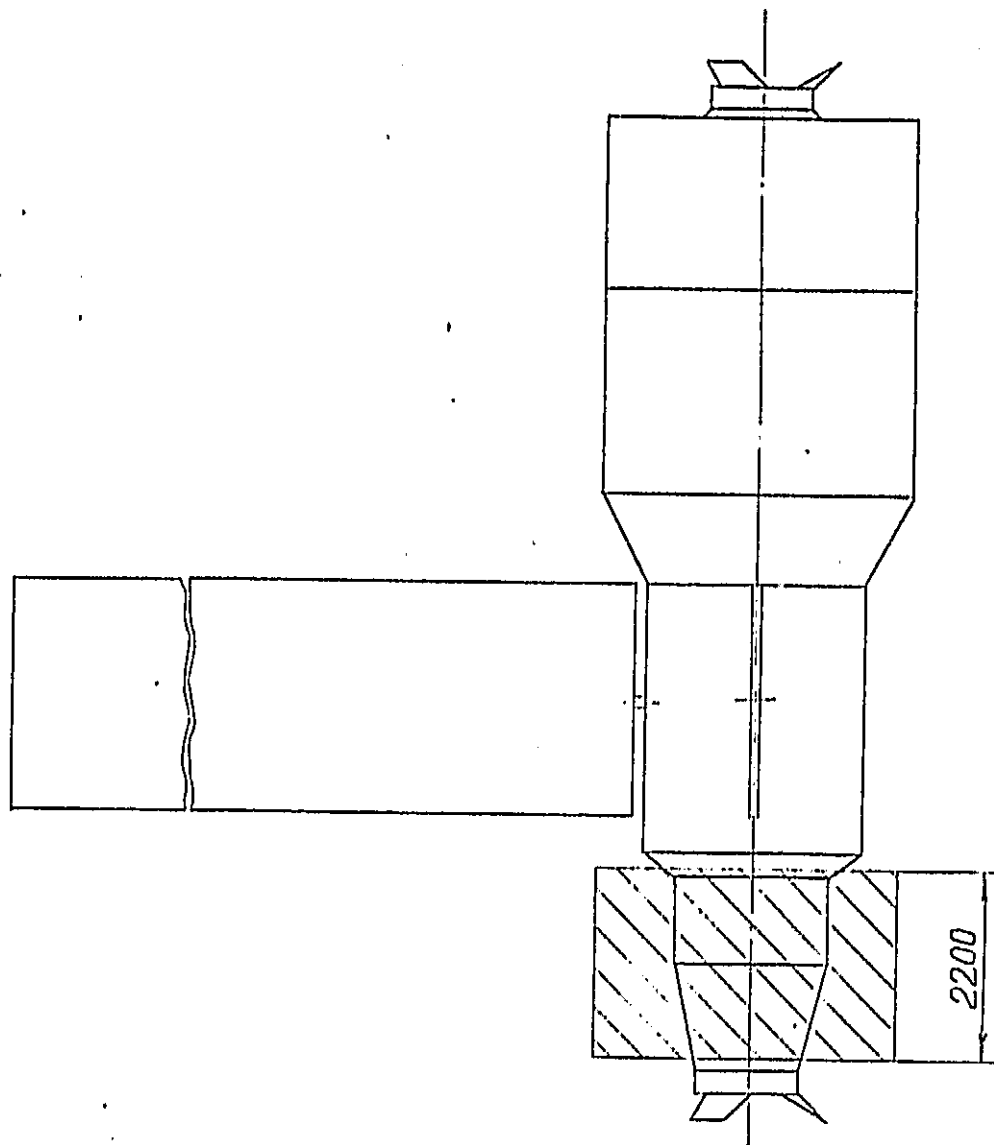

ORIGINAL PAGE IS
OF POOR QUALITY

2.3. Possible Locations for the Scientific Equipment
Transported by the "Shuttle" Craft (Variation I). Continued.

/17.

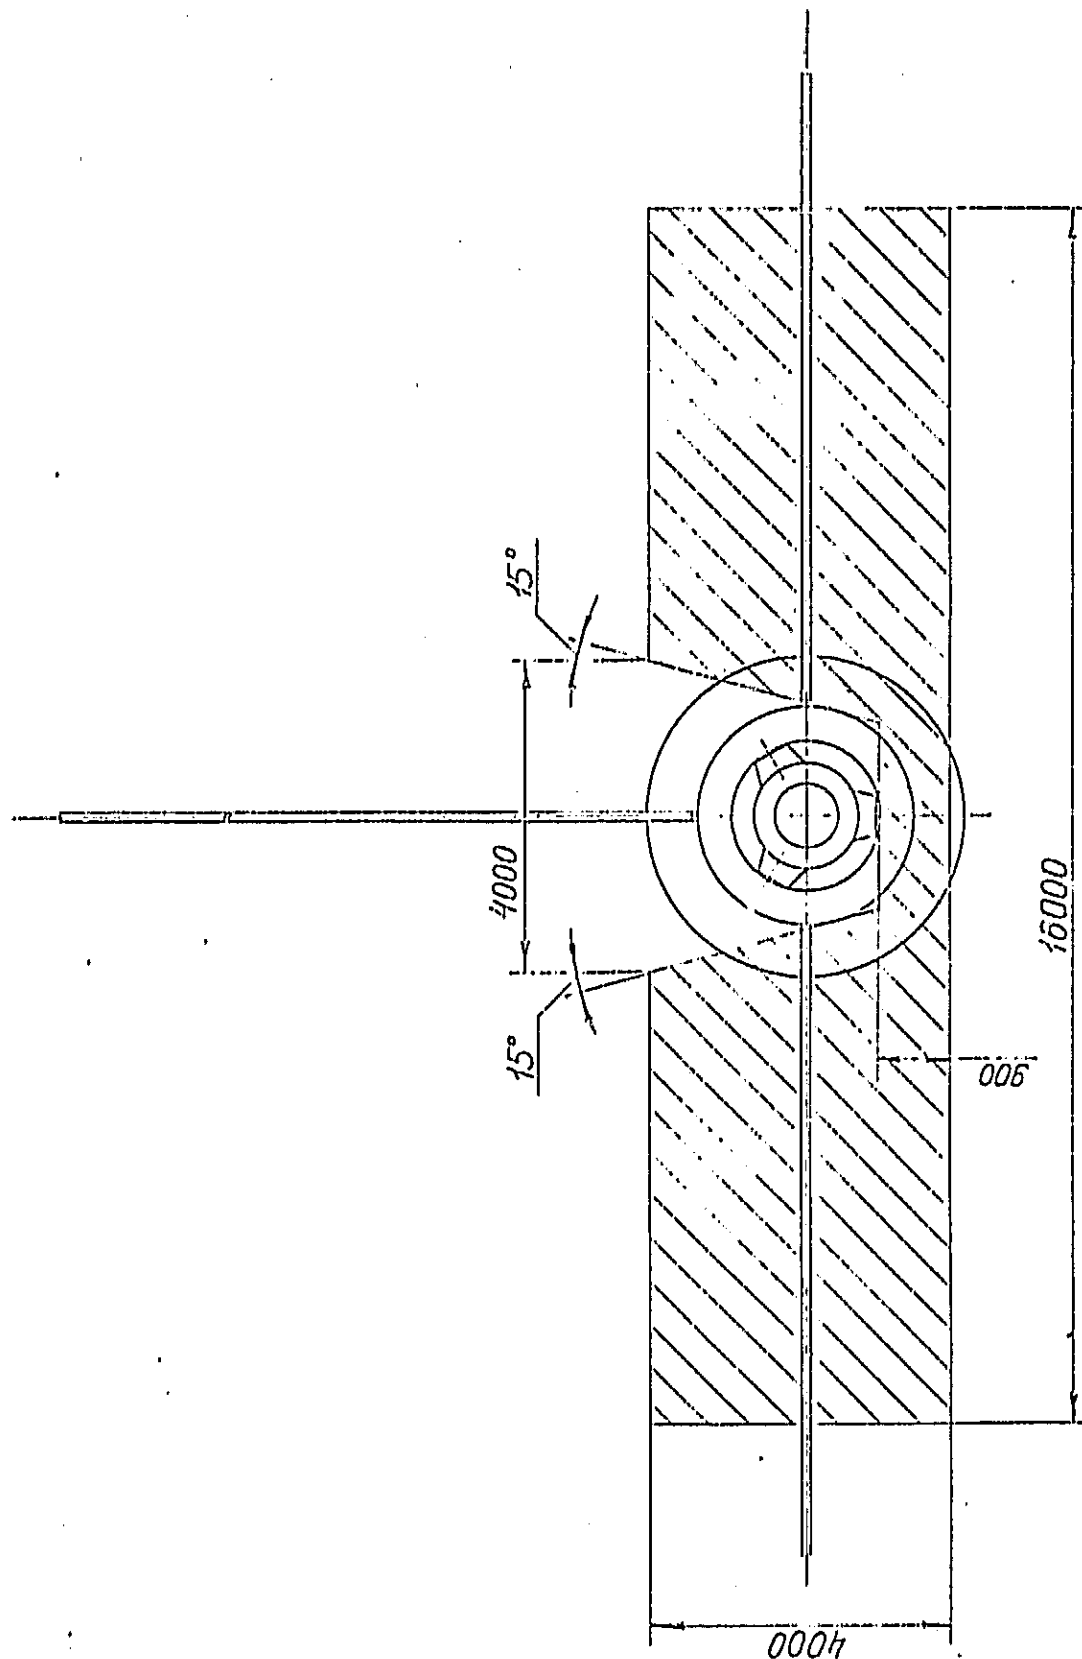


ORIGINAL PAGE IS
OF POOR QUALITY

17.


2.3. Possible Locations for the Scientific Equipment
Transported by the "Shuttle" Craft. (Variation 2).

/18.

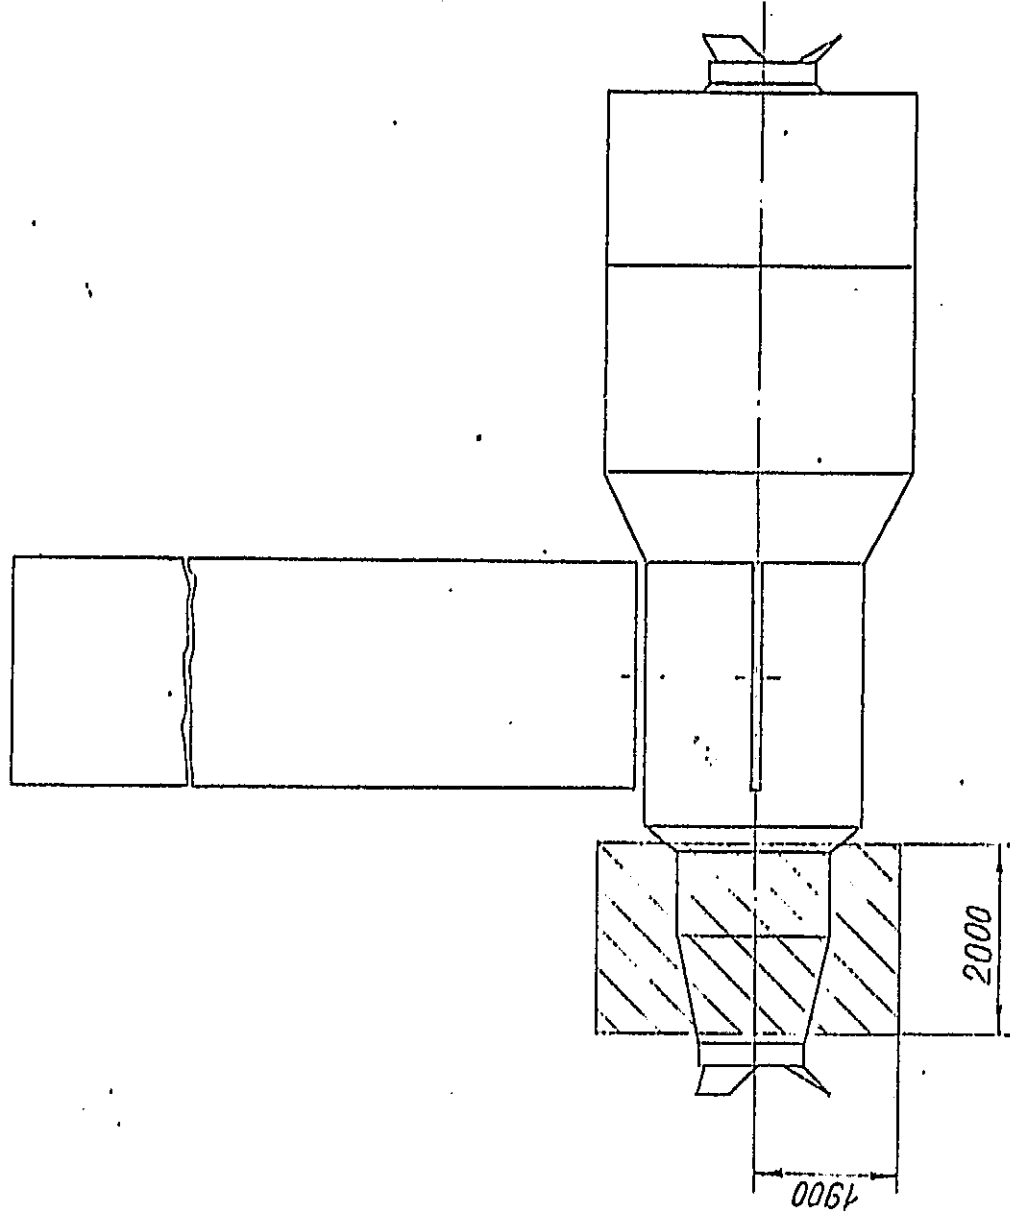

2.3. Possible Locations for the Scientific Equipment
Transported by the "Suttle" Craft (Variation 2). Continuation.


/19.

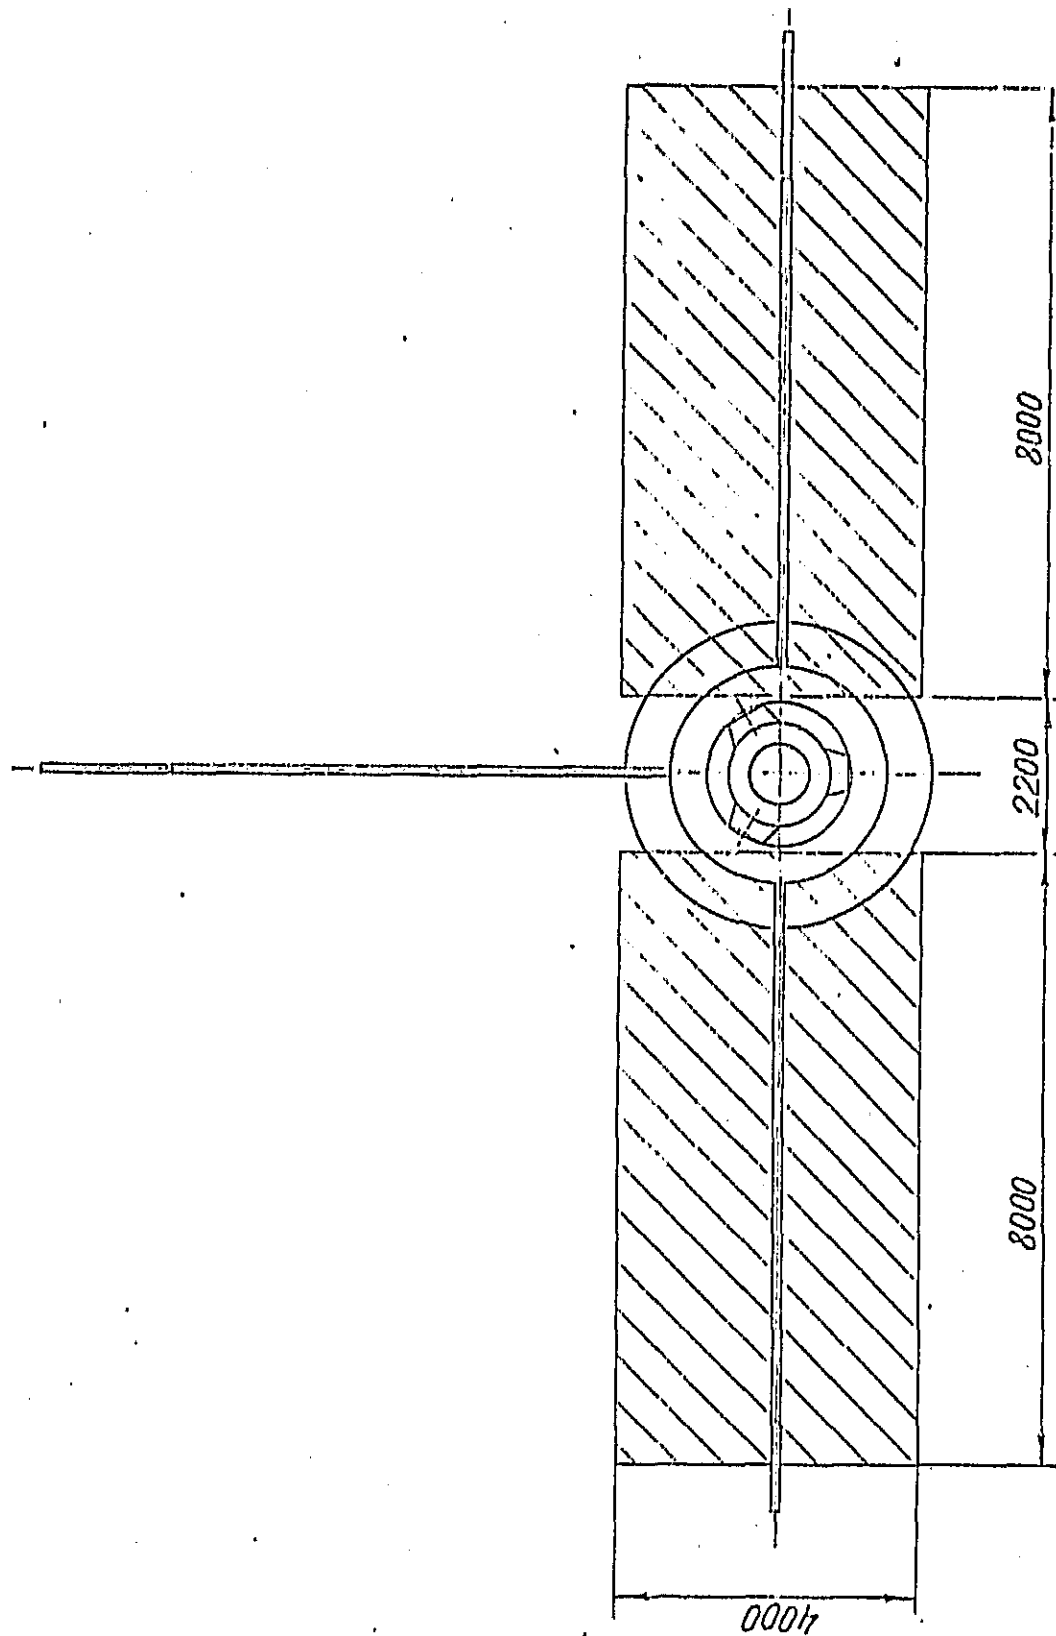

ORIGINAL PAGE IS
OF POOR QUALITY

2.4. Control Post for the "Salyut" Station

/20.

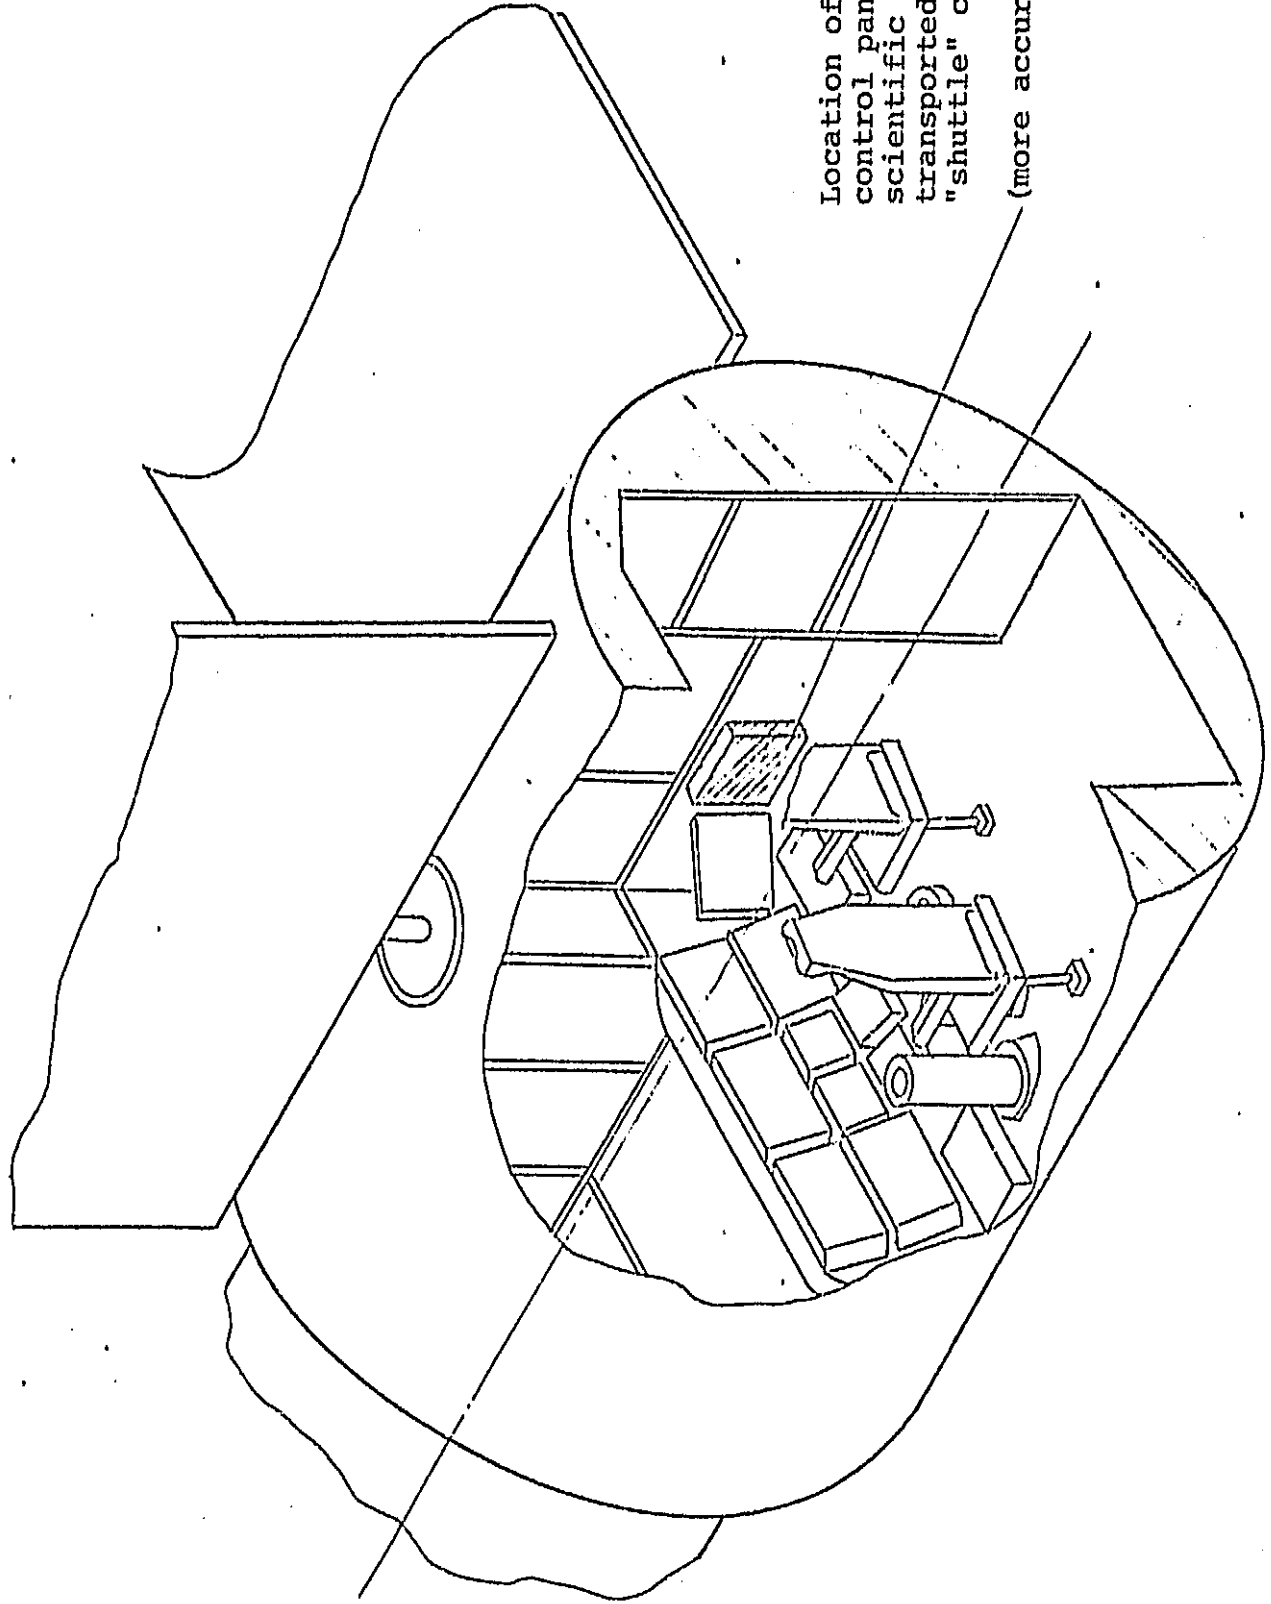

3. DOCKING UNITS

/21.


3.1. Type of Docking Units and Location of Electrical Plug and Socket Units

Characteristics or Working Conditions		Note
Item	Value	
3.1.1. Type of docking unit	Peripheral	Manual and Automatic engagement of the electrical plug and socket units is possible
3.1.2. Location of the electrical plug and socket units	Inside the duct	

ORIGINAL PAGE IS
OF POOR QUALITY



3.2. Location of the Docking Units of the Station

/22.

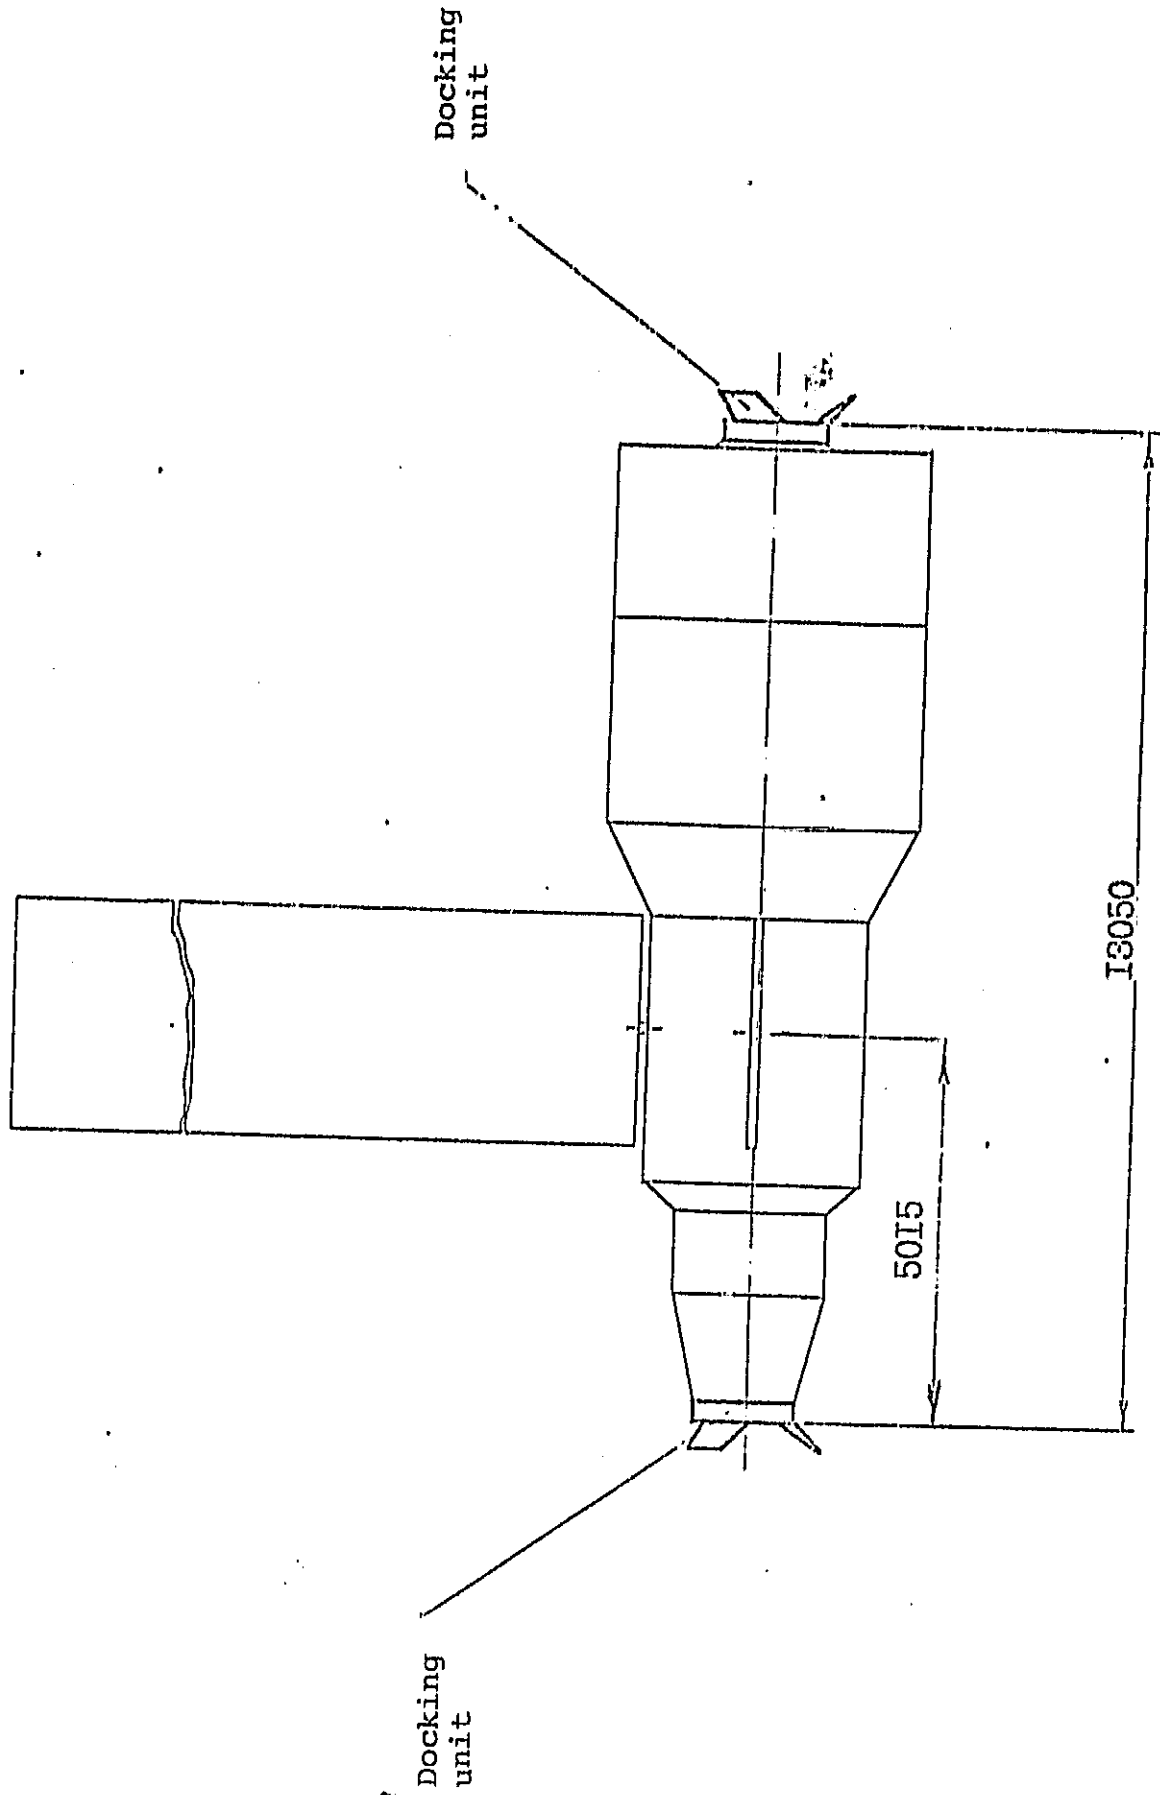

3.3. Design and Characteristic Dimensions of the Docking Units

/23.

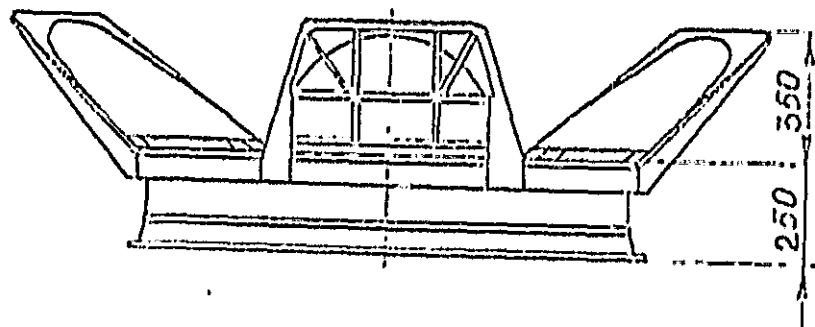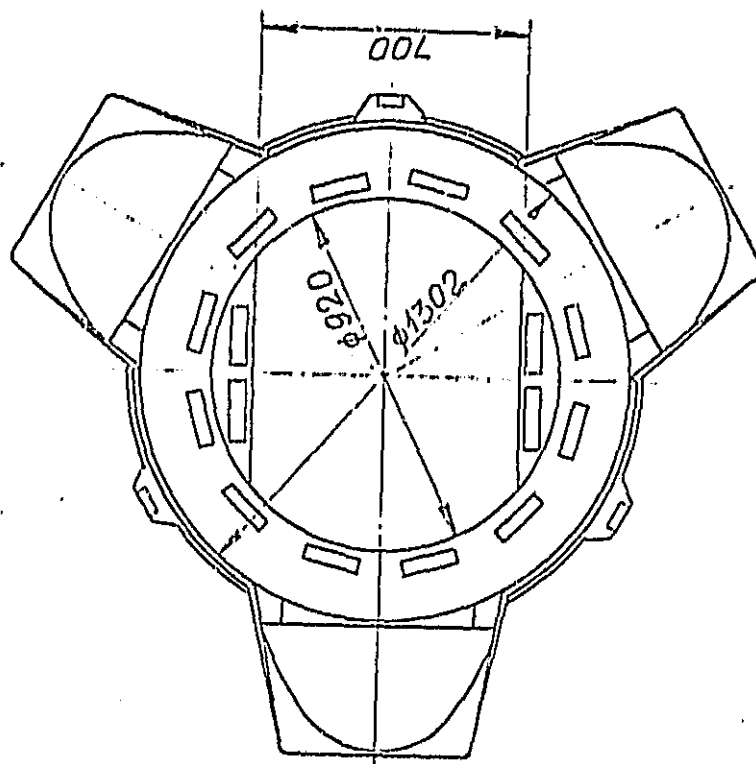

ORIGINAL PAGE IS
OF POOR QUALITY

4. ORIENTATION OF THE STATION RELATIVE TO THE
MASS CENTER AND STABILIZATION


/24.

4.1. Provision for Orientation

Characteristics and Working Conditions		Note
Item	Value	
4.1.1. Operation "A"	"Salyut" station - orientation relative to the mass center	"Shuttle craft - relative position of the mass center and orientation relative to the mass center
4.1.2. Operation "B"	Has to be determined	
4.1.3. Operation "C"	The "Salyut" station insures orientation	

4.2. Orbital orientation of the Station. Operation I.


/25.

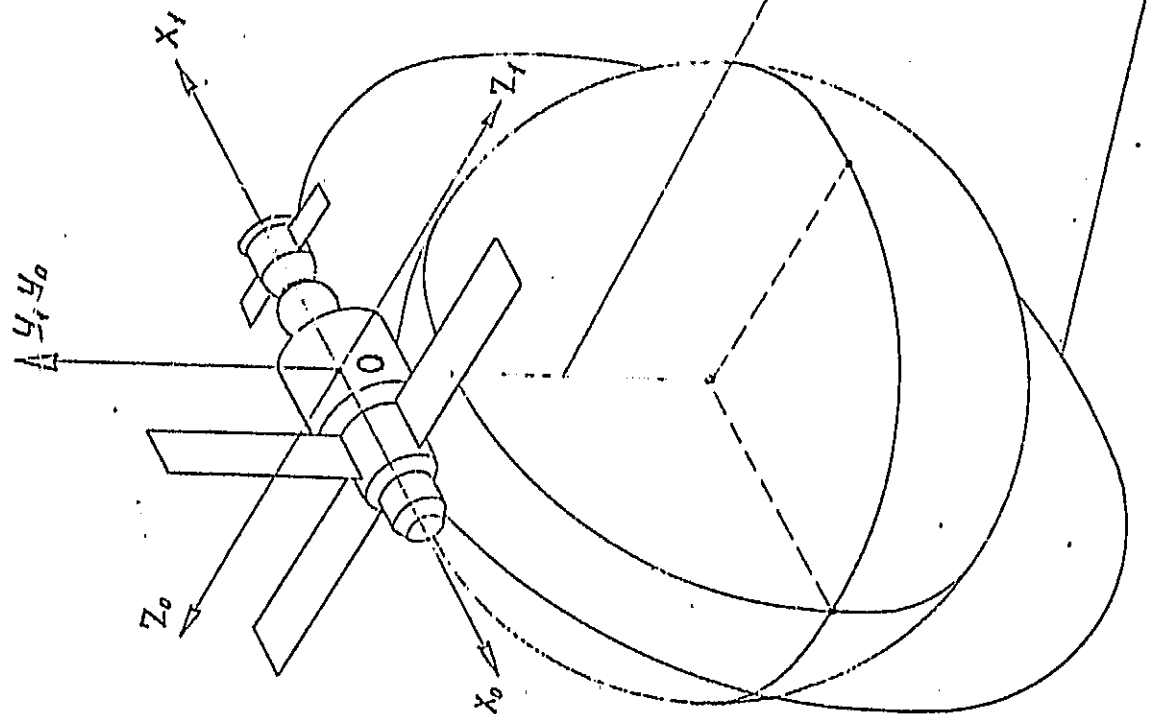

$O X_1 Y_1 Z_1$ - combined system of the station coordinates


$O X_0 Y_0 Z_0$ - orbital system of the coordinates

O - mass center of the station

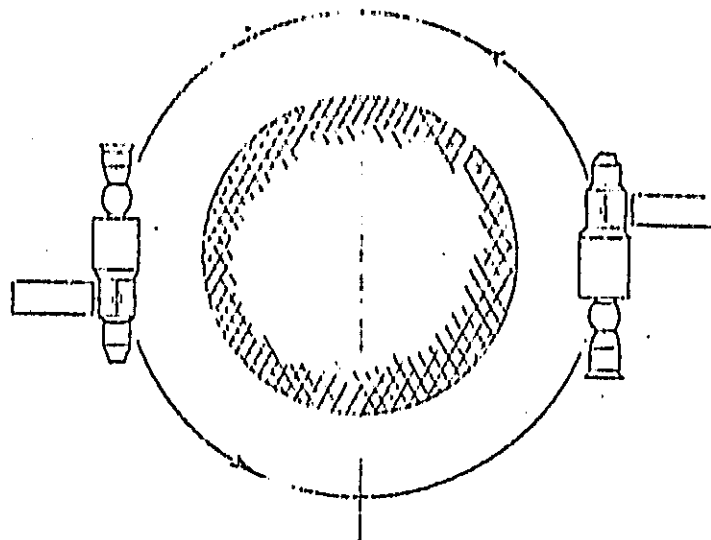

4.2. Orbital Orientation of the Station. Operation 2.


126.

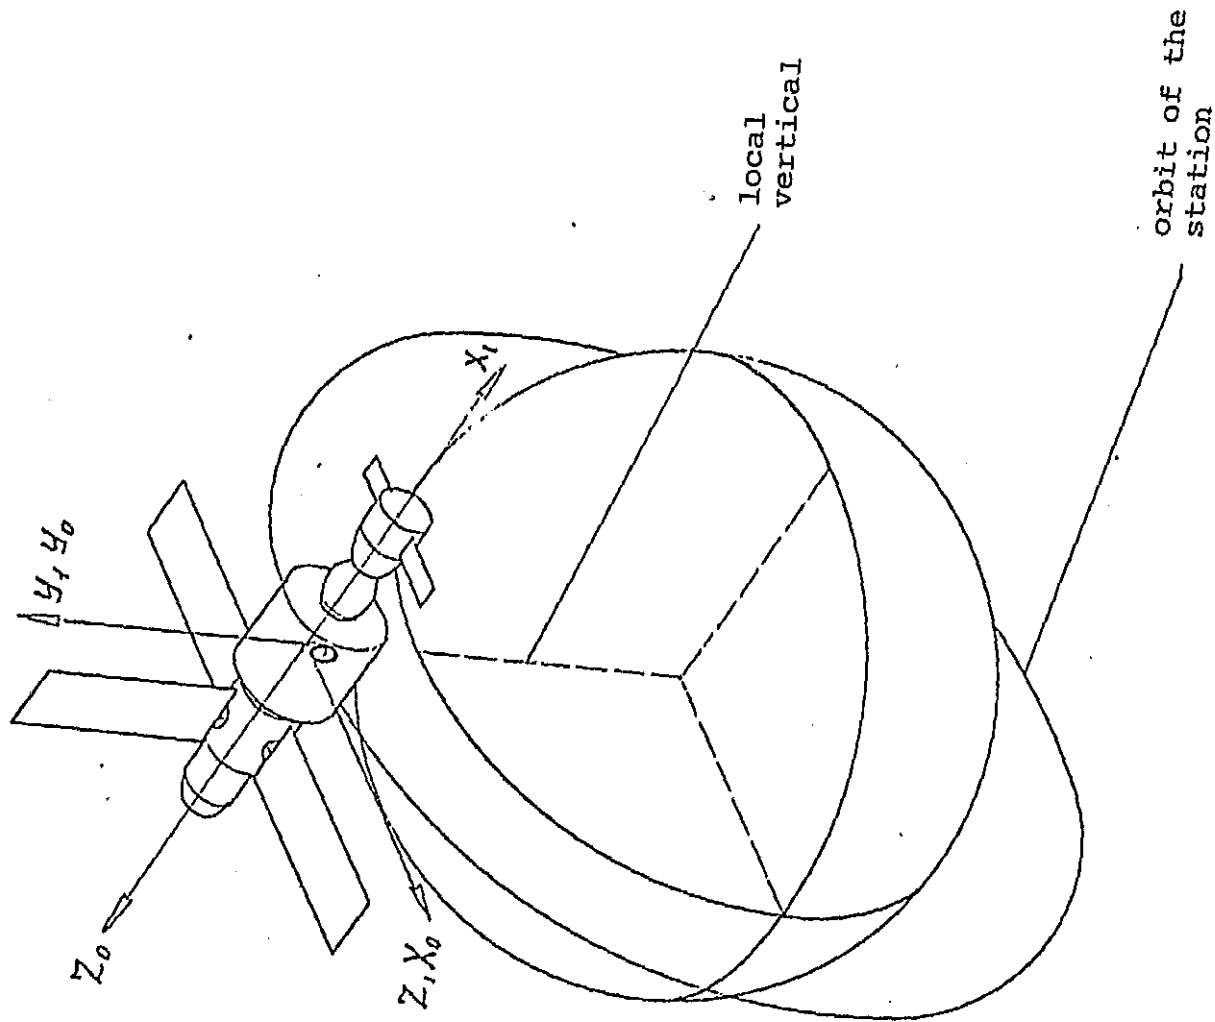

$O X_1 Y_1 Z_1$ - combined system of the station coordinates


$O X_0 Y_0 Z_0$ - orbital system of the coordinates

O - mass center of the station

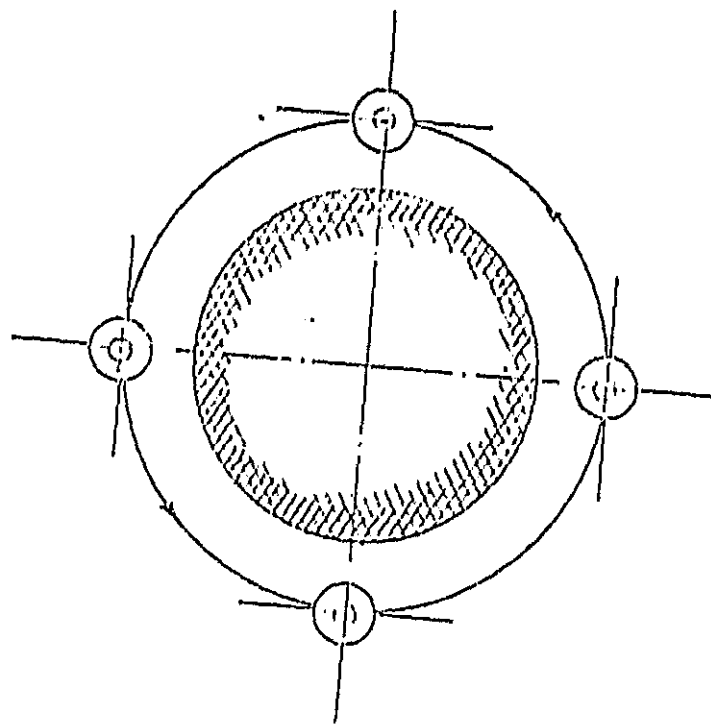


4.3. Inertia Orientation of the Station

/27.

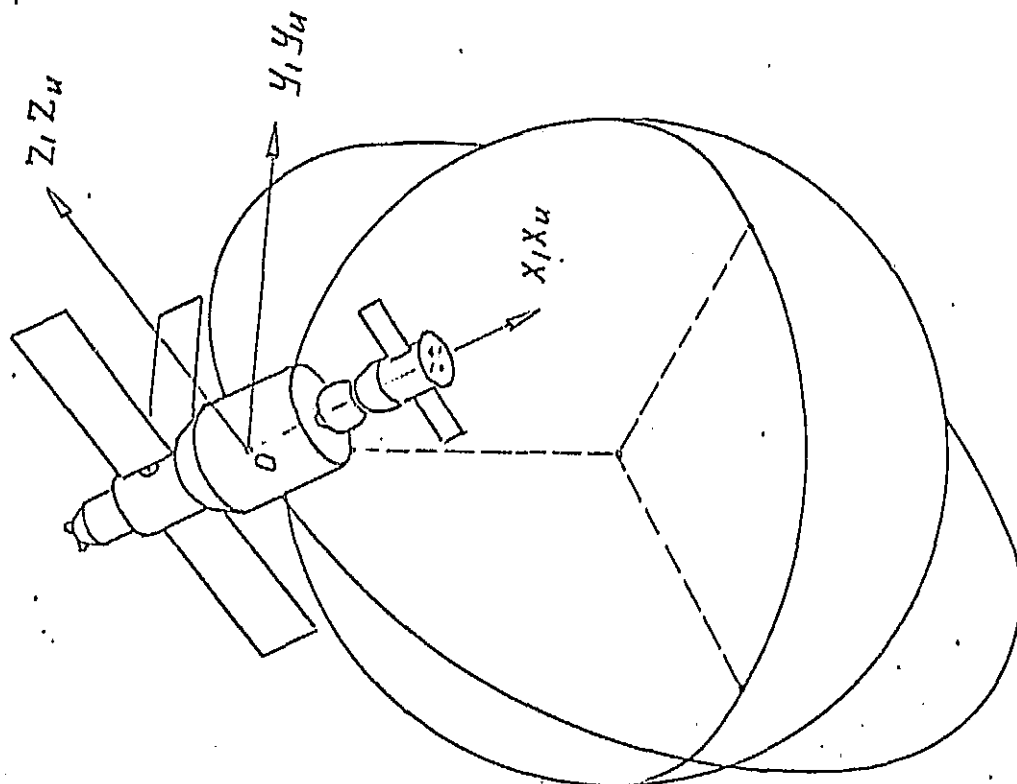

$O X_1 Y_1 Z_1$ - combined system of the station coordinates

$O X_u Y_u Z_u$ - inertia system of the coordinates

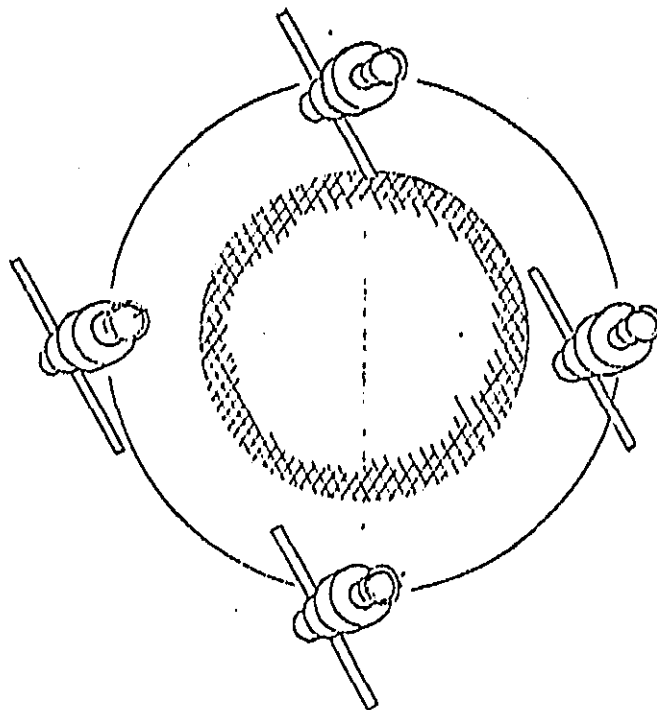

ORIGINAL PAGE IS
OF POOR QUALITY

4.4. Accuracy of the Orientation Operations of the Station /28.


Characteristics or Working Conditions		Note
Item	Value	
4.4.1. Accuracy of orbital orientation of the station, angle minute	± 50	
4.4.2. Accuracy of the inertia orientation, angle minute	± 10	

Characteristics or Working Conditions		Note
Item	Value	
4.5.1. Time of constant guidance, minutes	20-50	In operation "C"
4.5.2. Time for long-term guidance with periodic suspension of the assigned orientation (with a period of succession of the rotation period of the station), days.	up to 30	

ORIGINAL PAGE IS
OF POOR QUALITY

5. Diagram of Communications for the "Salyut" Station

/30.

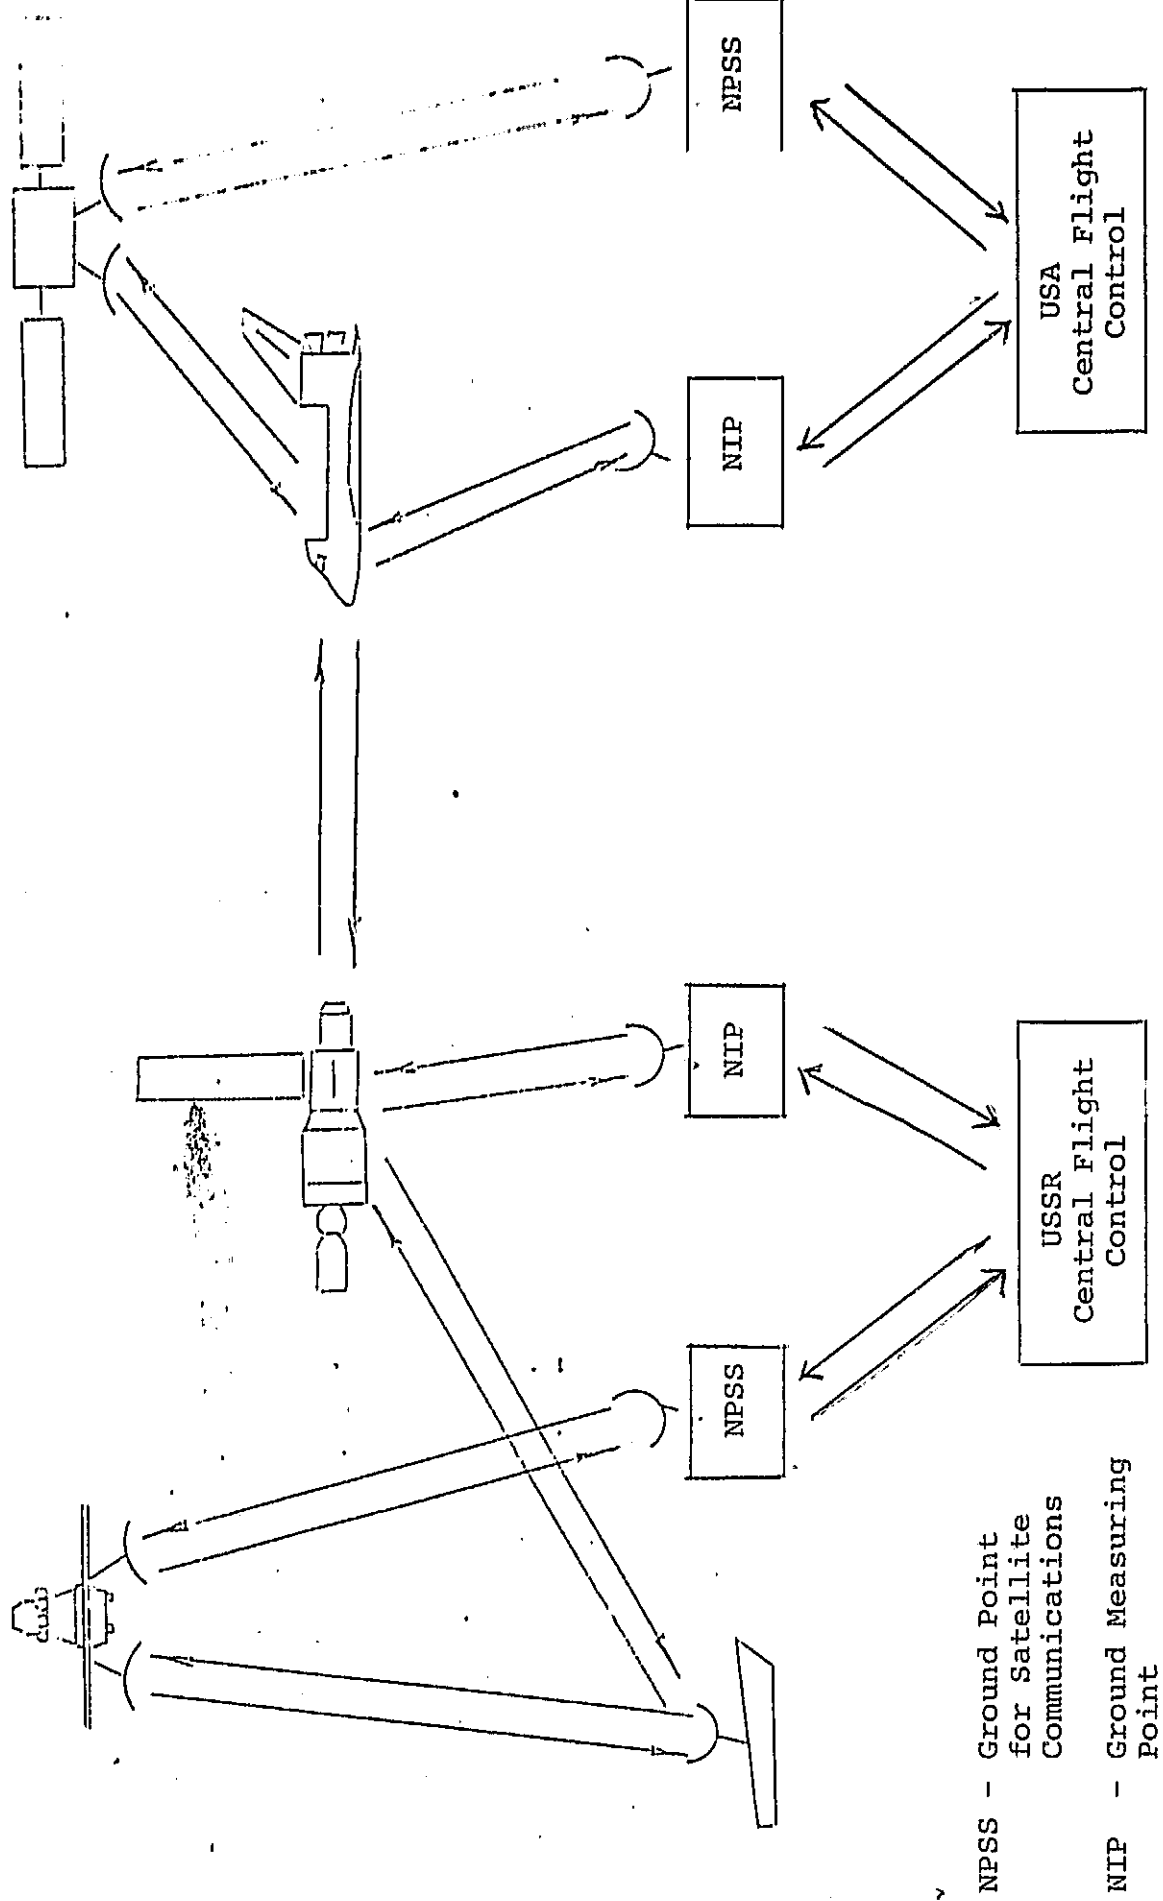

6. Power Supply for the Scientific Equipment

/31.

6.1. Power Yield

Characteristics and Working Conditions		Note:
Item	Value	
6.1.1. Average daily power yielded for supplying the scientific equipment, kilowatts	0.5-3	Depending on the location of the orbit relative to the sun and the orientation operation of the station

ORIGINAL PAGE IS
OF POOR QUALITY

Characteristics and Working Conditions		Note
Item	Value	
6.2.1. Nominal power voltage on the busbars of the scientific equipment, Volts	27	Direct Current Voltage dispersion from the nominal is to be defined.

7. MAINTENANCE OF THE HEAT CONDITIONS FOR THE
SCIENTIFIC EQUIPMENT

/33.

7.1. Temperature Range

Characteristics or Working Conditions		Note
Item	Value	
7.1.1. Temperature range in hermetically sealed sections, °C	15-25	In the living quarters of the station

ORIGINAL PAGE IS
OF POOR QUALITY

Characteristics or Working Conditions		
Item	Value	Note
7.2.1. Removal and disposal of heat from the units of scientific equipment, installed on the outside of the station	By means of the units of the scientific equipment	
7.2.2. Heat removal from the scientific equipment installed inside the station	Ventilation with a stream of air	Temperature in the instruments' zone 0 ÷ 40°C

ORIGINAL PAGE IS
OF POOR QUALITY

8. ATMOSPHERIC CHARACTERISTICS IN THE HERMETICALLY
SEALED COMPARTMENTS

/35.

8.1. Volume

Characteristics or Working Conditions		
Item	Value	Note
8.1.1. Volume of the hermetically sealed compartments of the station at the moment of docking with the "shuttle" craft, m ³	100	


Characteristics and Working Conditions		Note
Item	Value	
8.2.1. Total pressure in the hermetically sealed compartments, mm mercury column	490-960	
8.2.2. Partial oxygen pressure, mm mercury column	510-200	
8.2.3. Carbon dioxide partial pressure (not more than) mm mercury column	7	
8.2.4. Partial pressure of water vapors, mm mercury column	8-13	

ORIGINAL PAGE IS
OF POOR QUALITY

9. REACTIVE CONTROL INSTRUMENTS

137.

9.1 Outline of the Location of the Engines

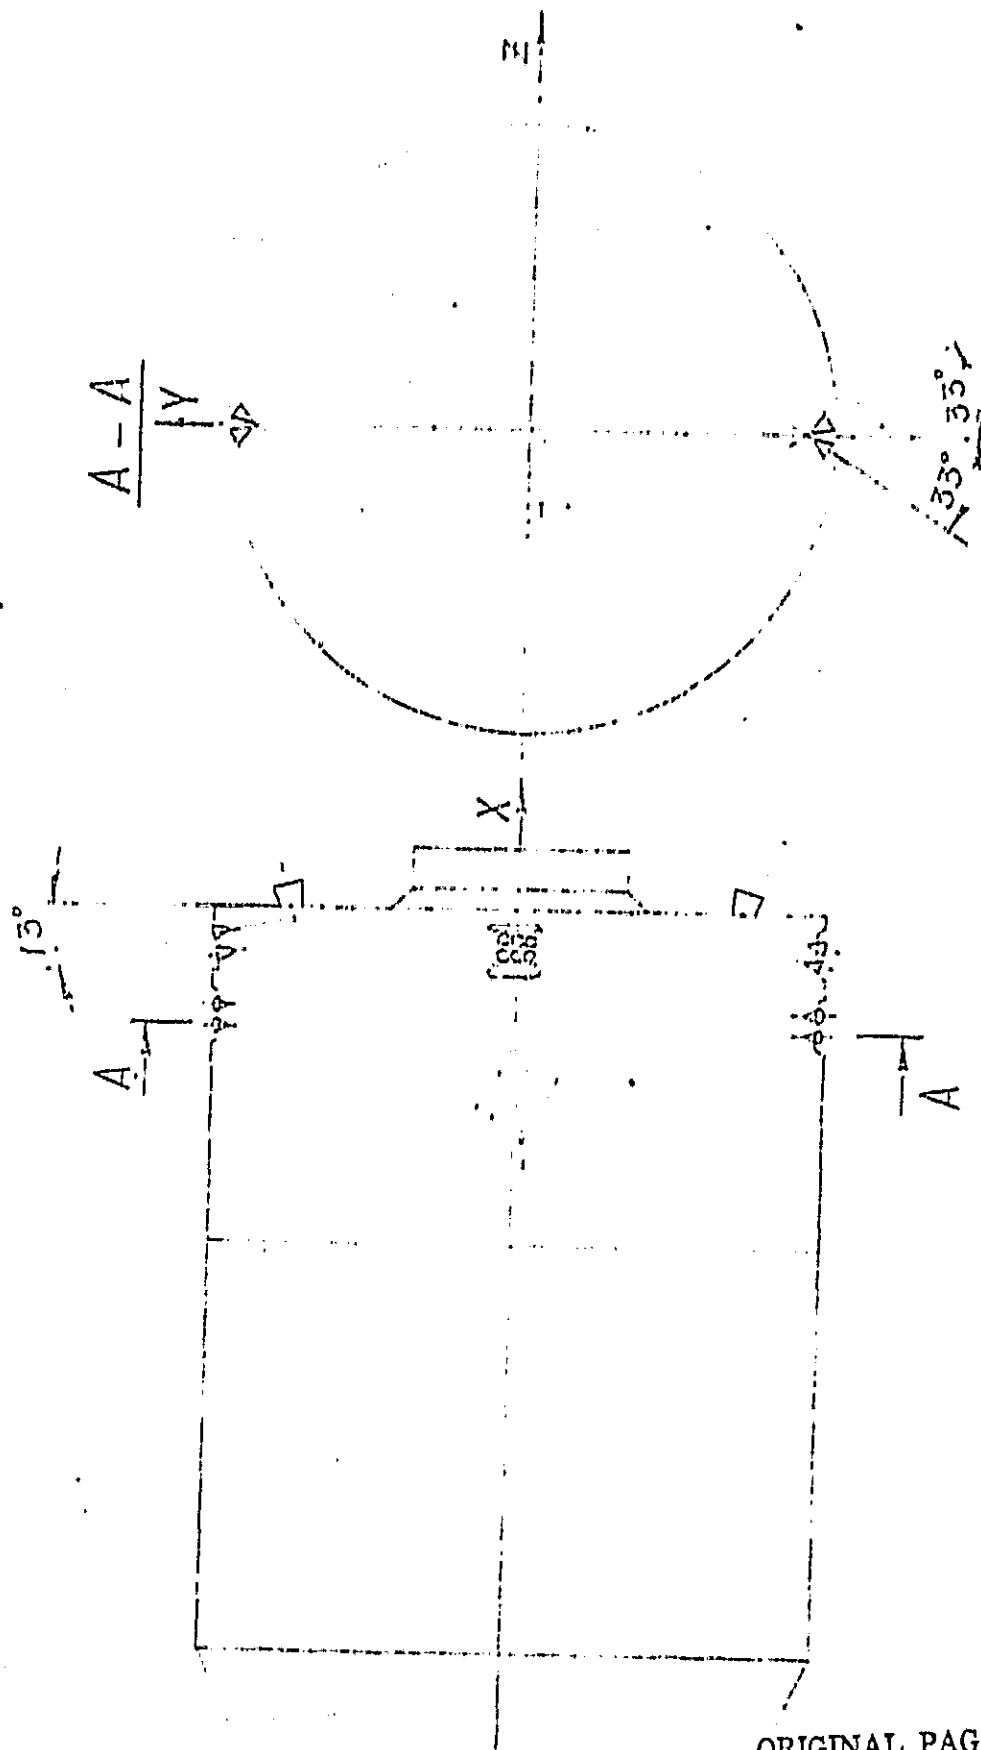

Characteristics or Working Conditions		Note
Item	Value	
9.2.1. Fuel	Unsymmetrical Dimethyl- hydrazine	
9.2.2. Oxidizing agent	Nitrogen tetroxide	

10. CHARACTERISTICS OF FLIGHT TIME

/39.

10.1. Stability and Accuracy of Coordination

Characteristics or Working Conditions		Note
Item	Value	
10.1.1 Stability of flight time	5×10^{-7} 10^{-9}	<p>For the entire flight time of the station</p> <p>For 36 hours flight time of the station</p>
10.1.2. Accuracy of coordinating flight time with ground time, milliseconds	± 50	

ORIGINAL PAGE IS
OF POOR QUALITY

11. RENDEZVOUS AND DOCKING CHARACTERISTICS OF THE
"SALYUT" SPACE STATION AND THE "SHUTTLE" CRAFT

/40.

11.1. Distribution of Functions and Orientation Operation

Characteristics or Working Conditions		Note
Item	Value	
11.1.1. Function of the "Salyut" station during rendezvous	Passive craft	
11.1.2. Orientation operation of the "Salyut" station during rendezvous with the "shuttle"	Stabilization on the transducers of the angular speeds	Angular speeds along each axis ≤ 0.06 degree/sec

11.2. Parameters of Movement of the "Shuttle" craft
Relative to the Station Which Should Be Considered
For the Development of the Docking Unit and
Other Structural Elements

/41.

Characteristics or Working Conditions		Note
Item	Value	
11.2.1 Rendezvous speed, Meters/sec	0.05-0.152	The data correspond to the "Summary Document" of the meeting of specialists from NASA and the Academy of Sciences of the USSR, October, 1973, Moscow
11.2.2 Lateral velocity component m/sec	0±0.061	
11.2.3 Lateral misalignment, m	0±0.229	
11.2.4 Angular misalignment, degrees	0±6	
11.2.5 Bank turn, degrees	0±5	

Characteristics or Working Conditions		Note
Item	Value	
11.2.6. Angular speed for the active craft, degrees/sec	0 ± 0.3	
11.2.7. Angular speed for the passive craft, degrees/sec	0 ± 0.3	